



UQS-COB-12W-WW-24V

Professional Led Strip, 12 W/m



TECHNICAL DETAILS

| | |
|-------------------------------------|---|
| SUPPLY VOLTAGE | 24 V ± 0.5 VDC |
| POWER | 12 W/m |
| CURRENT | 0.5 A/m |
| POWER PER REEL (5M) | 40 W |
| COLOR TEMPERATURE | 3000K |
| BEAM ANGLE | 180° |
| LUMINOUS FLUX PER METER | 1060 lm |
| CRI | 90 |
| MAXIMUM LENGTH FOR ONE SIDED SUPPLY | 5 m |
| IP PROTECTION DEGREE | IP20 |
| WORKING TEMPERATURE | -20°C ~ 50°C |
| STORAGE TEMPERATURE | -30°C ~ 80°C |
| LED QTY (PER METER) | 480 LEDs/m |
| WIDTH PCB | 10 mm |
| CUT SECTION | 50 mm |
| CONNECTION WIRE | 2 x AWG20 (0.52 mm ²) stranded wire, length = 360 mm: V+: red: V:-black |
| DIMENSIONS (L * W * H) | 5004 x 10 x 2.2 mm |
| PACKING | 5 m /roll (bag); 50 pcs / ctn; ctn dimensions: 45 x 45 x 26.5 cm |

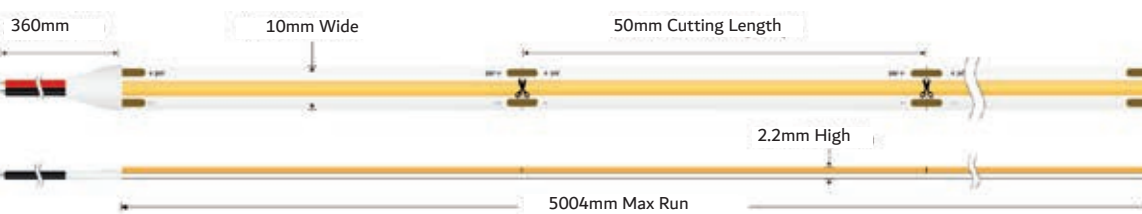

CONNECTORS PCB Width 10 mm



UQS-COB-12W-SS




UQS-COB-12W-CS



MW LIGHTING

UQS-COB-12W-WW-24V

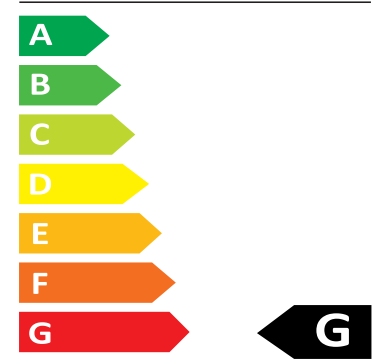

6 kWh/1000h

